

<b>FREQUENCY STABILITY</b>	
OVER:	
OPERATING TEMP. RANGE :	see note 1
LONG TERM AGING 1ST YEAR:	< ±0.7 ppm *
10 YEARS:	< ±4.0 ppm *
SUPPLY VOLTAGE ± 0.2 V	< ±0.1 ppm *
LOAD ±10%:	< ±0.01 ppm
<b>POWER SUPPLY</b>	
SUPPLY INPUT:	V <sub>CC</sub> = 5 V ±0.2 V *
INPUT CURRENT :	< 80 mA @ +30 °C *
INPUT CURRENT :	< 120 mA @ -20 °C *
<b>FREQUENCY CONTROL RANGE</b>	
CONTROL VOLTAGE:	see note 2
FREQUENCY DEVIATION:	> ±4 ppm *
RESPONSE SLOPE:	positive
<b>OUTPUT</b>	
OUTPUT SIGNAL:	HC-MOS compatible
SYMMETRY:	40 (min.) / 60 (max.) % @ V <sub>CC</sub> / 2 *
RISE AND FALL TIME:	tr < 7ns    tf < 7 ns *
LEVEL „0“ AND „1“:	< 0.4 V    > V <sub>CC</sub> - 0.5 V
FAN OUT (LOAD):	10 LS
<b>ENVIRONMENT</b>	
OPERABLE TEMP. RANGE:	-40 to +85 °C
STORAGE TEMP. RANGE:	-65 to +125 °C
VIBRATION:	10 to 2000 Hz / 10 g
SHOCK:	2000 g, 0.3 ms, ½ sine
PACKAGE:	DIL 14, 4 pins, GND to case
PACKAGE HEIGHT:	8 mm (see packaging info)
<b>WARM-UP</b>	
ΔF/F:	within spec after 30s @ 0 °C *
CURRENT:	< 250 mA during 10s
<b>MISCELLANEOUS</b>	
SHORT TERM STABILITY:	< 5 E-10    0.1 s to 30 s Typical 5 E-11 @ 1 s
PHASE NOISE (BW = 1Hz):	10 Hz: -100 dBc / Hz 100 Hz: -130 dBc / Hz 1 KHz: -140 dBc / Hz 10 KHz: -145 dBc / Hz
* Customer's specification on request	

<b>NOTE 1</b>	
TEMP. RANGE *	<b>OCXOV-AR1, AV5</b> 0 to +60 °C
STABILITY *	±0.2 ppm (0.4 ppm peak to peak)
TEMP. RANGE *	<b>OCXOV-BR1, BV5</b> -20 to +70 °C
STABILITY *	±0.3 ppm (0.6 ppm peak to peak)
TEMP. RANGE *	<b>OCXOV-CR1, CV5</b> -40 to +85 °C
STABILITY *	±0.5 ppm (1 ppm peak to peak)

<b>NOTE 2</b>	
ADJUSTMENT WITH RESISTOR	<b>OCXOV-AR1, BR1, CR1</b> 0 to 10 kΩ (connected to ground)
INPUT IMPEDANCE	> -4.7 kΩ
ADJUSTMENT WITH VOLTAGE	<b>OCXOV-AV5, BV5, CV5</b> 0.5 to 5 V
INPUT IMPEDANCE	> 47 kΩ

<b>MARKING EXAMPLE</b>			
<b>Micro Crystal</b>		<b>Micro Crystal</b>	
OCXOV-BV5		Type	Spec No.
20.000 MHz	09.25	Frequency	Date Code
○	12	○ (PIN 1)	Piece No.

<b>ORDERING INFORMATION EXAMPLE</b>			
O C X O V - B V 5 20 MHz x x x			
Oscillator Type	OCXO = oven controlled Crystal Oscillator		N° of customer spec.
Oscillator Version	V = low power voltage 5V	Oscillator output frequency	
Temperature Range	A = 0 to +60°C; +/-0.2ppm B = -20 to +70°C; +/-0.3ppm C = -40 to +85°C; +/-0.5ppm X = custom spec.	Frequency Adjustment	R1 = external resistor V5 = voltage 5V Y = custom spec.

<b>STANDARD FREQUENCIES (MHz)</b>					
10.0000	12.8000	16.0000	16.3840	19.4400	20.0000
26.0000	40.0000	50.0000	52.0000		

DATE:	October 2009	Revision No.: 8
-------	--------------	-----------------


In accordance with our policy of continuous development and improvement, we reserve the right to modify the design or the specifications of our products without prior notice.

Headquarters: Micro Crystal AG  
Mühlestrasse 14  
CH-2540 Grenchen  
Switzerland


Tel. +41 32 655 82 82  
Fax +41 32 655 80 90  
Internet www.microcrystal.ch  
Email sales@microcrystal.ch

### Application and Test Circuit:

#### Adjustment with voltage

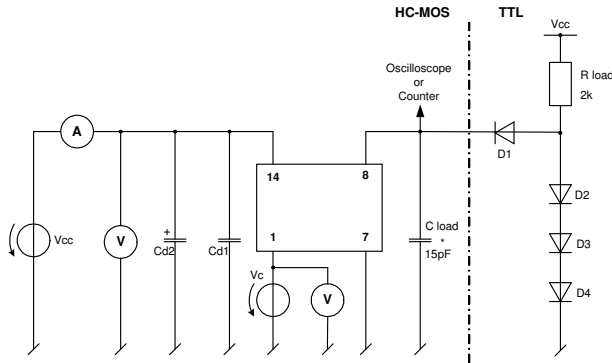


#### Adjustment with resistor

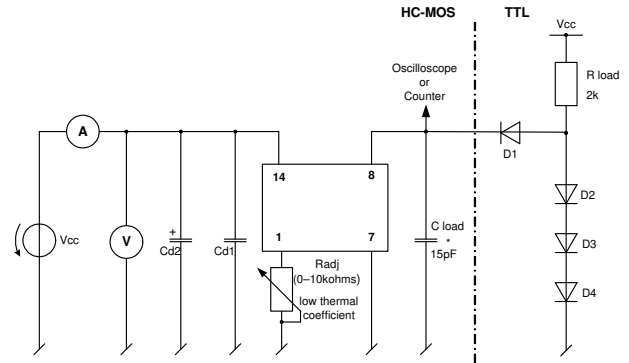


### Waveform Output:

#### Waveshape TTL

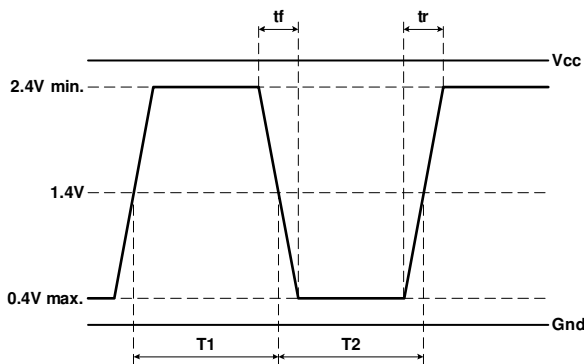

#### Waveshape HC-MOS

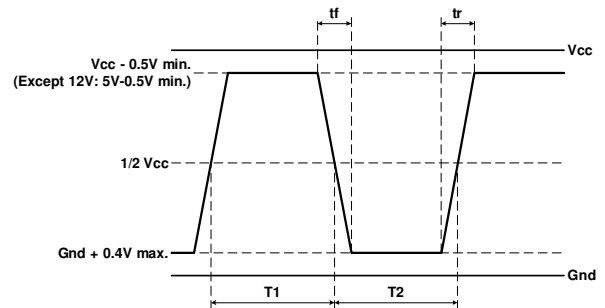

$$Duty\ Cycle = 100 \times \frac{T1}{T1 + T2} [\%]$$